



Ø140x100mm CA140-100T Series 交流多翼式鼓风机




规格:

风量范围:	217 ~ 250 CFM
风轮材质:	外框铝压铸成型, 风轮采用镀锌板制成, 表面黑色电泳
马达:	电容感应启动外转子电动机
转子外观:	黑色烤漆
轴承类型:	双滚珠轴承, 长效免维护
接线方式:	AWG# 18 UL
工作电压:	115VAC 机型 - 85VAC 到 125VAC 230VAC 机型 - 185VAC 到 245VAC
绝缘等级:	B级 / F 级
安全保护:	自动过热保护
工作温度:	2C: -20°C 到 +60°C 3C: -20°C 到 +70°C
产品净重:	2C - 3000g; 3C - 2580g

型号 (Item Code)	电压 (VAC)	频率 (Hz)	电流 (A)	输入功率 (W)	转速 (RPM)	风量 (CFM)	风量 (m ³ /min)	静压 (inch-H ₂ O)	噪音 dB(A)	电容 (μF)
CA1V140-100T-FMG-B38-2C	115V	50/60	1.06/1.22	120/140	1800/1670	250/232	7.1/6.6	1.55/2.05	64/62	12μF 200VAC
CA2V140-100T-FMG-B38-2C	230V	50/60	0.54/0.63	124/144	1790/1630	250/232	7.1/6.6	1.55/2.05	64/62	3μF 400VAC
CA1V140-100T-FMG-B38-3C	115V	50/60	0.88/0.99	101/113	1490/1410	231/218	6.6/6.2	1.51/2.0	60/58	10μF 200VAC
CA2V140-100T-FMG-B38-3C	230V	50/60	0.44/0.50	102/113	1530/1440	231/217	6.6/6.1	1.51/2.0	60/58	2.5μF 400VAC

性能曲线图:

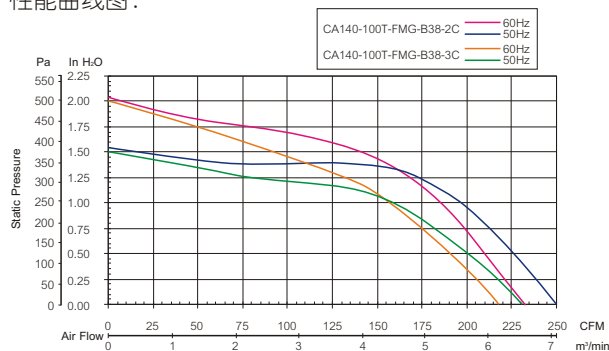

工程机构图:

单位:mm(Inch)

