



# Ø146x100mm CA146-100T Series 交流多翼式鼓风机




## 规格:

风量范围:	255 ~ 325 CFM
风轮材质:	外框铝压铸成型, 风轮采用镀锌板制成, 表面黑色电泳
马达:	电容感应启动外转子电动机
转子外观:	黑色烤漆
轴承类型:	双滚珠轴承, 长效免维护
接线方式:	AWG# 18 UL
工作电压:	115VAC 机型 - 85VAC 到 125VAC 230VAC 机型 - 185VAC 到 245VAC
绝缘等级:	B级 / F 级
安全保护:	自动过热保护
工作温度:	-20°C 到 +60°C
产品净重:	2800g

型号 (Item Code)	电压 (VAC)	频率 (Hz)	电流 (A)	输入功率 (W)	转速 (RPM)	风量 (CFM)	风量 (m <sup>3</sup> /min)	静压 (inch-H <sub>2</sub> O)	噪音 dB(A)	电容 (μF)
CA1V146-100T-FMG-B38-2C	115V	50/60	1.84/2.13	209/243	1930/2010	313/325	8.9/9.2	1.75/2.50	67/67	20μF 200VAC
CA2V146-100T-FMG-B38-2C	230V	50/60	0.93/1.06	211/242	1910/1950	314/320	8.9/9.1	1.75/2.50	67/67	5μF 400VAC
CA1V146-100T-FMG-B38-3C	115V	50/60	1.20/1.34	136/154	1680/1600	270/255	7.6/7.2	1.72/2.40	63/62	12μF 200VAC
CA2V146-100T-FMG-B38-3C	230V	50/60	0.60/0.66	138/153	1680/1600	270/255	7.6/7.2	1.72/2.40	63/62	3μF 400VAC

## 性能曲线图:

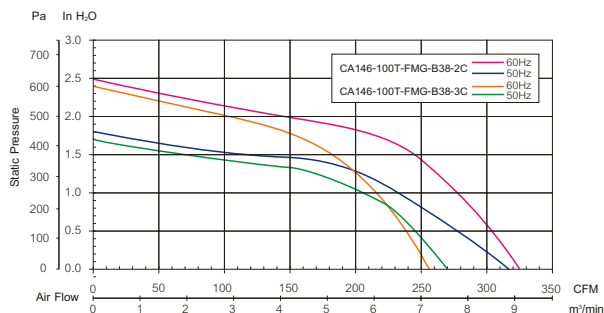

## 工程机构图:

单位:mm(Inch)

